



LAROSA
Hardware & Equip. Co. L.L.C
Machinery Consultant & Supplier Since 1996

(+971) 6 543 0053
sales@larosagroup.com
www.larosagroup.com

Industrial Area 2,
P.O Box : 41007,
Sharjah-U.A.E


imix100

PU INJECTION MACHINE



STANDARD FEATURES:

- 100 liters tanks capacity with magnetic level switches for loading facility with visualization;
- Low rev stirrer for Polyol component;
- PT100 probe for components temperature control;
- High efficiency gear pumps with variable delivery via frequency converter;
- Safety pressure gauge digital type;
- Mixing head with continuous recirculation of the components;
- Hot water cleaning facility.
- Control panel with CE marking with sequential control via industrial PLC of the major manufacturers;
- "Touch-screen" graphic operator panel having display 5,7" for machine settings and control;
- Temperature control via PID system integrated inside the PLC unit;
- Troubleshooting of each alarm remote on the operator panel in clear text;
- Selection of 12off different pouring programs;
- As option a volumetric flow-rate controller can be installed with close-loop control.

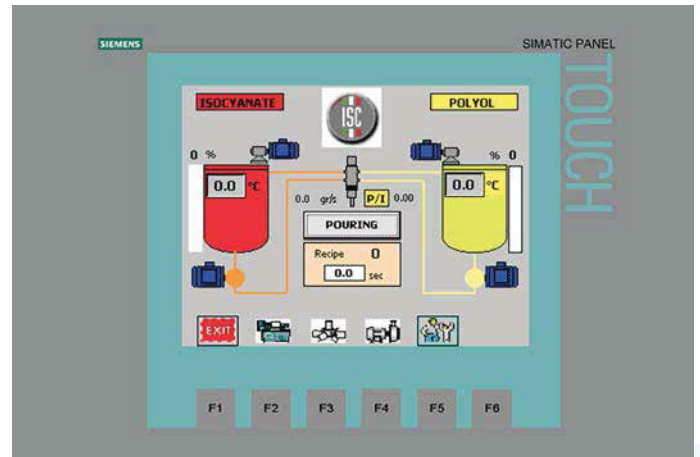

MODEL IMIX	PORTATE / FLOW-RATES				POTENZA CHILLER	CONSUMO CONSUMPTION	PESO WEIGHT
	R = 1:1		R = 2:1/1:2				
	MIN	MAX	MIN	MAX			
100	350	1650	200	1200	12000	12,0	750

Flow-rates are related for components having S.W. 1,1 and viscosity of 2000 mPas. Possibility to have specific machines according final customer requirements.



شركة لاروزا
للأدوات و المعدات الحديدية ذ. م. م

TOLL FREE : 800 527672